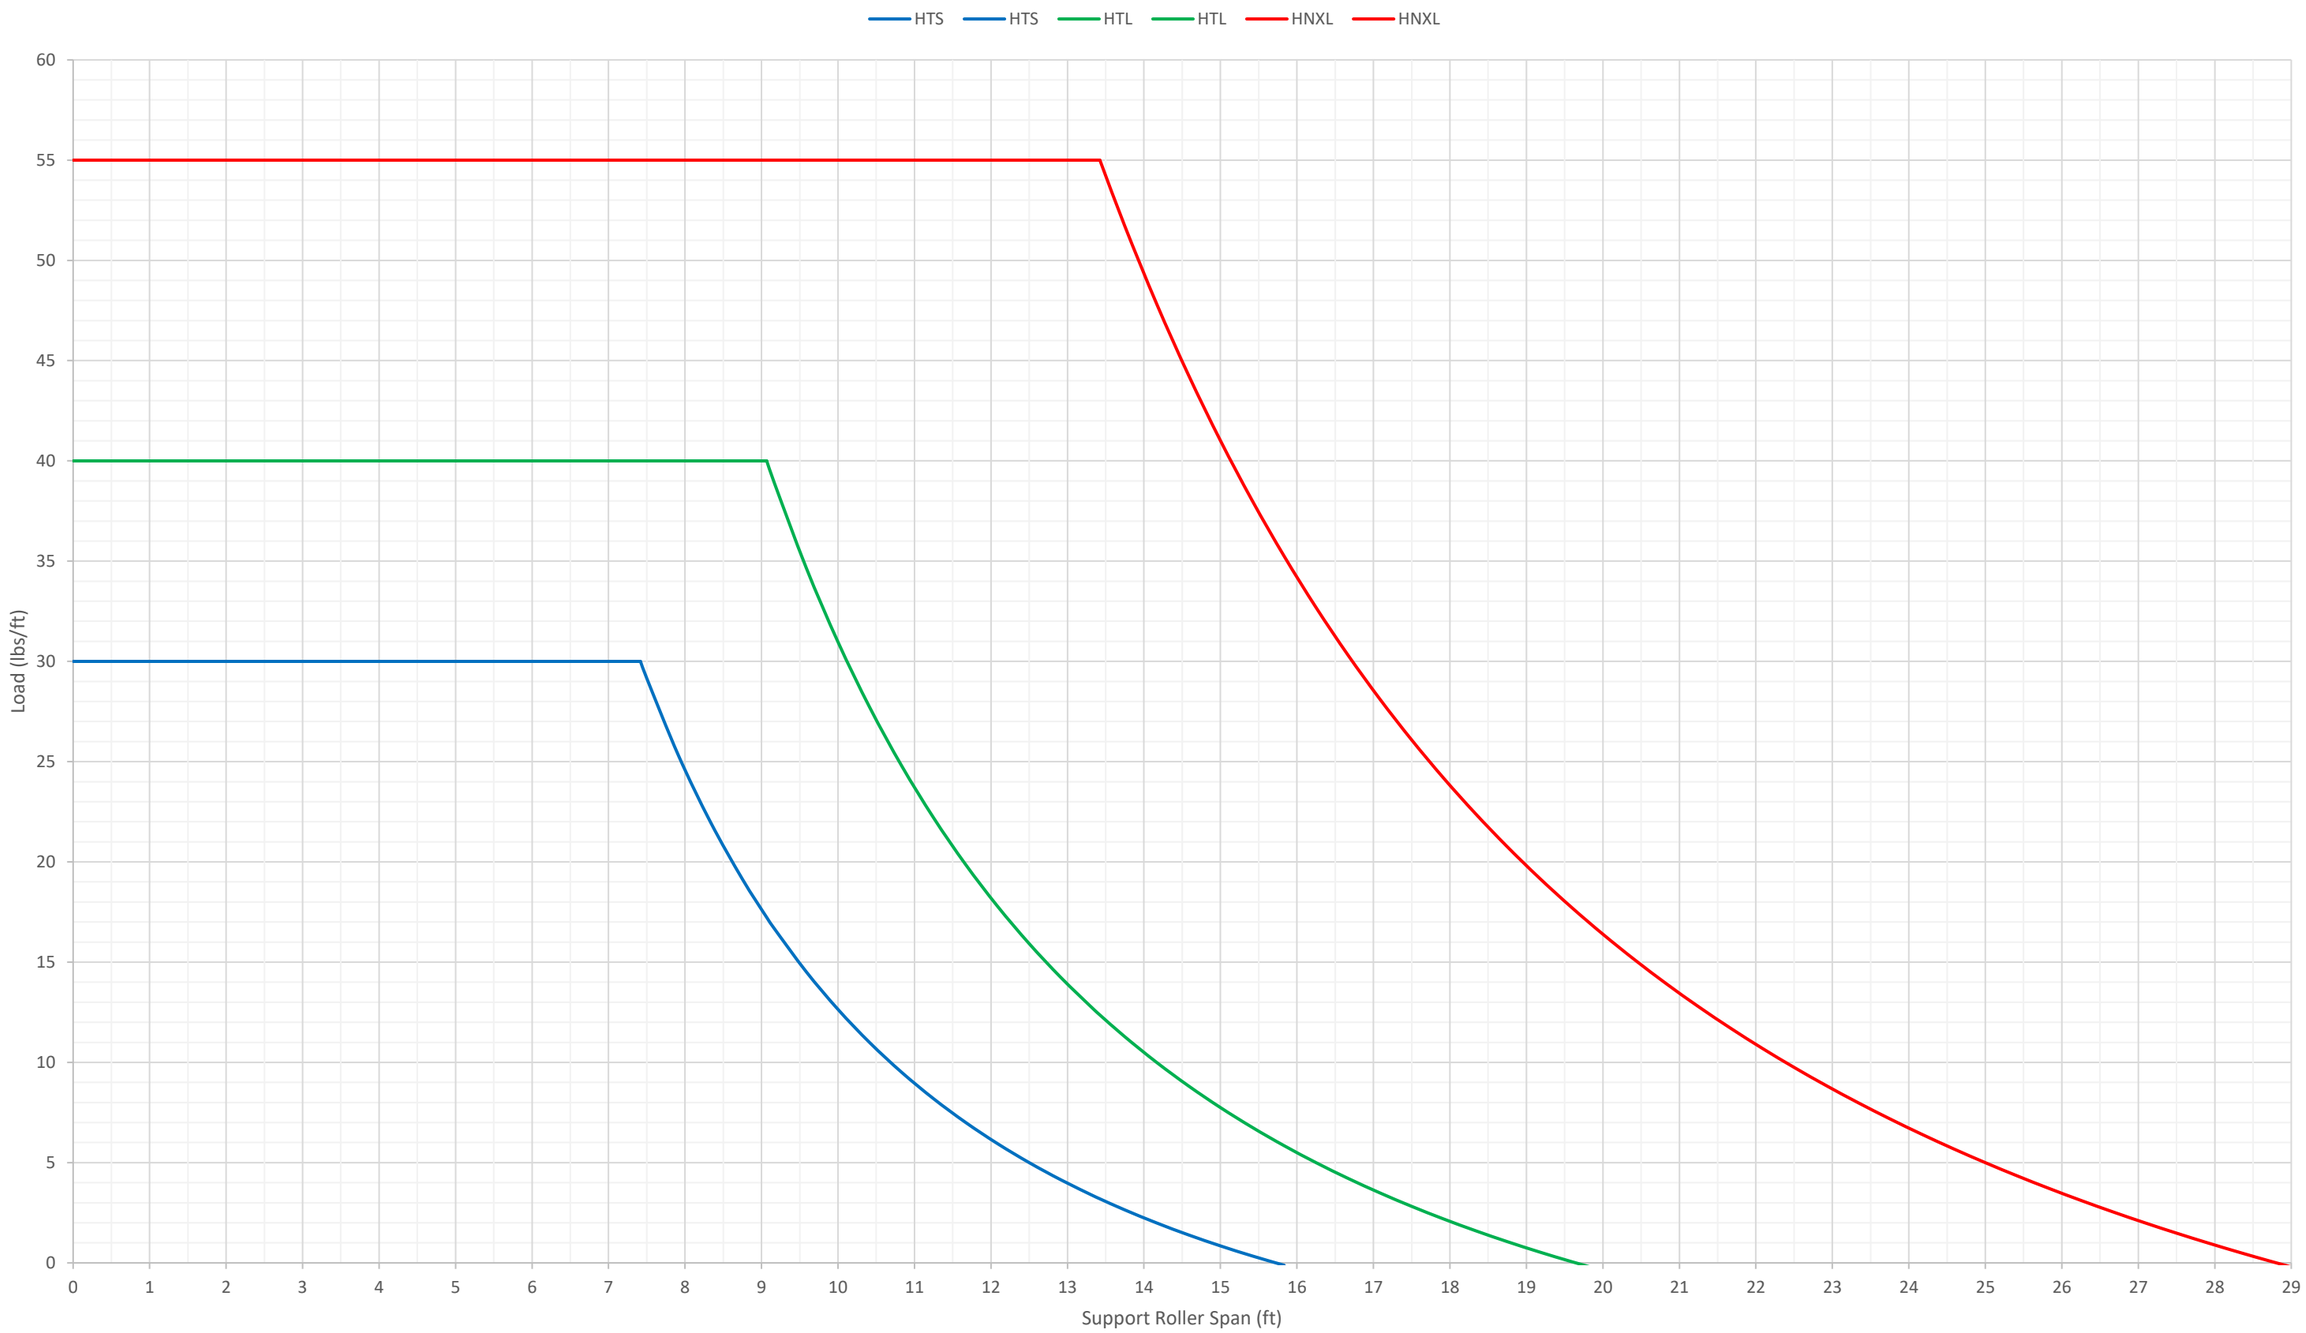Hybrid Load Chart with 1 or 2 Support Rollers